


BRAAP WERKS

PRODUCT INFO *and* SPECS

BRAAP OPEN GEAR LUBE #BW16-301

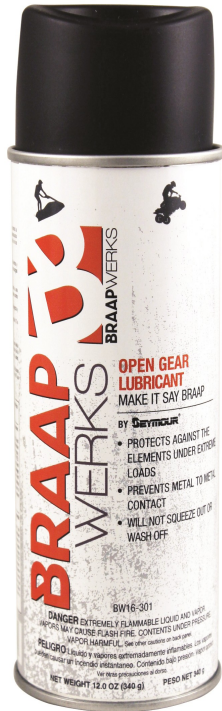

A heavy duty black lubricant that offers superior lubricity and adhesion to gears. Improves the gear efficiency and will not dry out or leave harmful deposits. Open Gear Lube is unaffected by salt water, detergents, and most chemicals. Performs well under extreme pressures and temperatures. An extension tube is furnished for pinpoint application.

Suggested Uses:

Open gears
Cams
Slides
Roller chains
Slow moving bearings
Latches
Trailers jacks, winches, and steering components

Packaging:

UPC Code 043281009317
Cans per case 6
Shipping weight per case 9 lbs.
Container 16 fluid ounce can
Label weight 12 ounces (340 grams)
Shipping Classification Consumer Commodity ORM-D, UN 1950
Hazard Class 2.1

Properties:

Cleanup Paint or lacquer thinner
Flammability Extremely Flammable
Flash point -4F
Specific Gravity 0.75
Solids Content 49%
VOC content 40%
HAPs content 0
Storage Temperature 40-90F
Application Temperature 40-100F
Lubricity Rating Excellent
Active Ingredient Asphalt and Pine Tar
Appearance Black, tacky
Operating Speed 500+ RPM
High Temperature Resistance 250F
Low Temperature Resistance -10F
Heavy Load Capability Extremely Heavy Loads
Shelf life Guaranteed for 2 years

Dry Time*:

Not applicable

Gloss:

Not applicable

12-20-2019



917 Crosby Avenue • Sycamore, Illinois 60178-1394
Phone: 800-435-4482 or 815-895-9101
Fax: 800-343-4258 or 815-895-8475
Web Site: www.seymourpaint.com