


## PBE GUIDE COAT

#20-1676

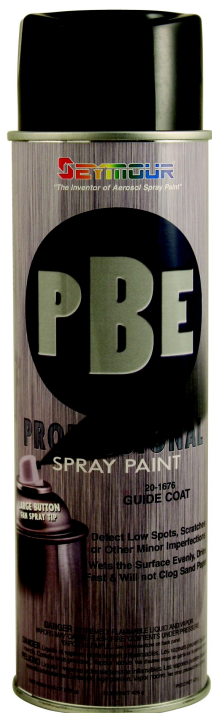

Guide Coat allows you to achieve a perfect repair every time. It provides a visual guide when sanding over primer, body fillers, and glazing putties. Detect low spots, scratches or other minor imperfections in the repair. This ultra thin coating wets the surface evenly, dries fast, and will not clog sandpaper.

### Suggested Uses:

Automotive body panels  
fiberglass  
wood

### Packaging:

UPC Code	043281002240
Cans per case	6
Shipping weight per case	9 lbs.
Container	20 fluid ounce can
Label weight	15 ounces (425 grams)
Shipping Classification	Consumer Commodity ORM-D, UN 1950
Hazard Class	2.1

### Properties:

Coverage	Up to 15 square feet
Cleanup	Paint/lacquer thinner
Flammability	Extremely Flammable
Flash point	-4F
Specific Gravity	0.85
MIR Value:	0.82, does not exceed 0.95
Solids Content	7%
HAPs content	9%
Storage Temperature	40-100F
Application Temperature	50-90F
Abrasion Resistance	Fair
Heat Resistance	250F continuous
Resin System	Acrylic lacquer
Shelf life	Guaranteed for 2 years

### Dry Time\*:

To touch	5 minutes
To Topcoat	15 minutes

\*At 72F, 50% humidity,  
0.3 mil thickness

**Gloss\*:** Flat, <15

\*as measured on a 60 degree gloss meter

12-19-2019