


# BRAAP WERKS

PRODUCT INFO *and* SPECS

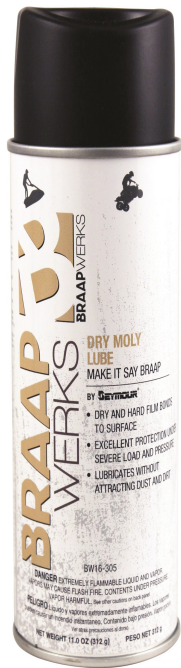

## BRAAP DRY MOLY LUBE

#BW16-305

A quick-drying, gray film that provides superior lubrication under extreme pressures and a broad temperature ranges. Excellent adhesion, oil free, and protects against seizing, fretting, and galling. Provides excellent anti-wear protection for cutting and forming tools.

### Suggested Uses:

- Dust free lubricant for pre-assembly and production
- Chains and sprockets
- Gasket and stop-off coating
- Rubber mold release
- Machine tool slides
- Joints, bushings, and latches

### Packaging:

UPC Code	043281009331
Cans per case	6
Shipping weight per case	9 lbs.
Container	16 fluid ounce can
Label weight	12 ounces (340 grams)
Shipping Classification	Consumer Commodity ORM-D, UN 1950
Hazard Class	2.1

### Properties:

Cleanup	Lacquer thinner
Flammability	Extremely Flammable
Flash point	-4F
Specific Gravity	0.80
Solids Content	3%
VOC content	47%, can't exceed 50%
HAPs content	7%
Storage Temperature	40-90F
Application Temperature	40-100F
Active Ingredient	Molybdenum Disulfide
Lubricity Rating	Excellent
Appearance	Black
Operating Speed	2000+ RPM
High Temperature Resistance	600 <sub>o</sub> F
Low Temperature Resistance	-100 <sub>o</sub> F
Heavy Load Capability	Yes
Shelf life	Guaranteed for 2 years

### Dry Time:

Not Applicable

### Gloss:

None

12-20-2019



917 Crosby Avenue • Sycamore, Illinois 60178-1394  
 Phone: 800-435-4482 or 815-895-9101  
 Fax: 800-343-4258 or 815-895-8475  
 Web Site: [www.seymourpaint.com](http://www.seymourpaint.com)