


BRAAP WERKS

PRODUCT INFO *and* SPECS

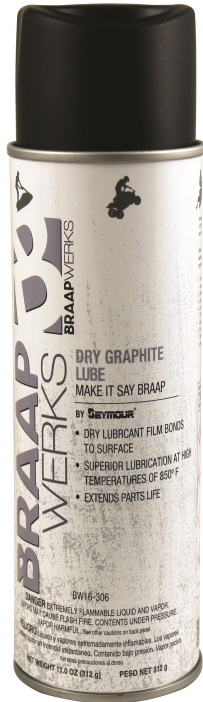

BRAAP DRY GRAPHITE LUBE #BW16-306

A fast drying gray graphite lubricant that reduces friction and noise. Effective under heavy pressures and continuously high temperatures. The oil-free formulation resists water and alkalis.

Suggested Uses:

Bearings, bushings, latches, linkages, cables, hinges
gaskets
Conveyor rollers/chains/hoists/wheels
Hinges and steering components
Rubber moldings
Dry anti-seize thread lubricant

Packaging:

UPC code	043281009348
Cans per case	6
Shipping weight per case	9 lbs.
Container	16 fluid ounce can
Label weight	12 ounces (340 grams)
Shipping Classification	Consumer Commodity, ORM-D, UN 1950
Hazard Class	2.1

Properties:

Cleanup	Lacquer thinner
Flammability	Extremely Flammable
Flash point	-4 F
Specific Gravity	0.80
Solids Content	3%
VOC content	42%, cannot exceed 50%
HAPs content	22%
Storage Temperature	40-100F
Application Temperature	50-90F
Extreme Pressures	Up to 25,000 PSI
Abrasion Resistance	Excellent
Gas Resistance	No
Heat Resistance	400° F continuous
Shelf life	Guaranteed for 2 years

Dry Time:

Not Applicable

Gloss:

None

12-20-2019



917 Crosby Avenue • Sycamore, Illinois 60178-1394
Phone: 800-435-4482 or 815-895-9101
Fax: 800-343-4258 or 815-895-8475
Web Site: www.seymourpaint.com