


BRAAP WERKS

PRODUCT INFO *and* SPECS

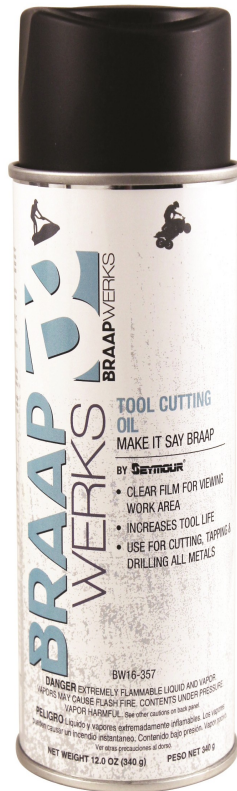

BRAAP TOOL CUTTING OIL

#BW16-357

A superior thread cutting lubricant that extends tool life and reduces downtime by cooling and lubricating at the cutting point. Outperforms average cutting oils due to the special anti-friction agents added. Resists runoff, eliminates scoring and chatter marks, and can be used on both ferrous and non-ferrous machining. Sprays in any position and an extension tube is provided for pinpoint application.

Suggested Uses:

All types of metal cutting
 Drilling, tapping, threading,
 and machinery
 Gear cutting
 Machining tough metals such as:
 Stainless steel
 Titanium
 Aluminum

Packaging:

UPC Code	043281009409
Cans per case	6
Shipping weight per case	9 lbs.
Container	16 fluid ounce can
Label weight	12 ounces (340 grams)
Shipping Classification	Consumer Commodity ORM-D, UN 1950
Hazard Class	2.1

Properties:

Cleanup	Lacquer thinner
Flammability	Extremely Flammable
Flash point	-4F
Specific Gravity	0.80
Solids Content	95%
VOC content	5%, cant exceed 50%
HAPs content	0
Storage Temperature	40-90F
Application Temperature	40-100F
Lubricity Rating	Excellent
Appearance	Clear
Weather Resistance	Excellent
Shelf life	Guaranteed for 2 years
Food contact rating	No

Dry Time:

Not Applicable

Gloss:

Not Applicable

12-20-2019



917 Crosby Avenue • Sycamore, Illinois 60178-1394

Phone: 800-435-4482 or 815-895-9101

Fax: 800-343-4258 or 815-895-8475

Web Site: www.seymourpaint.com